
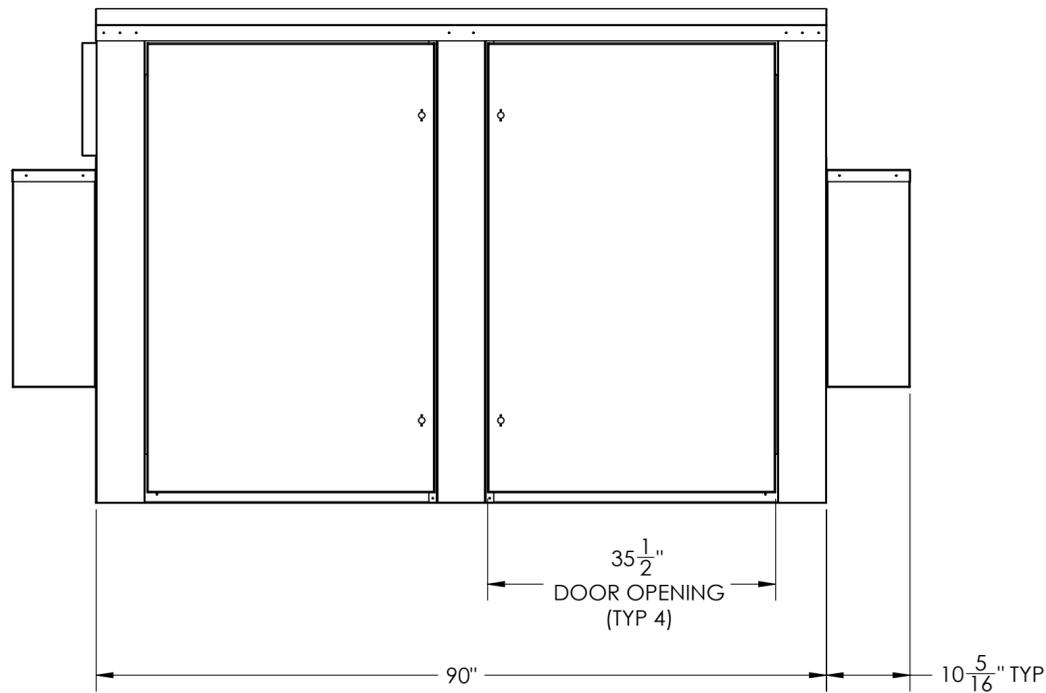
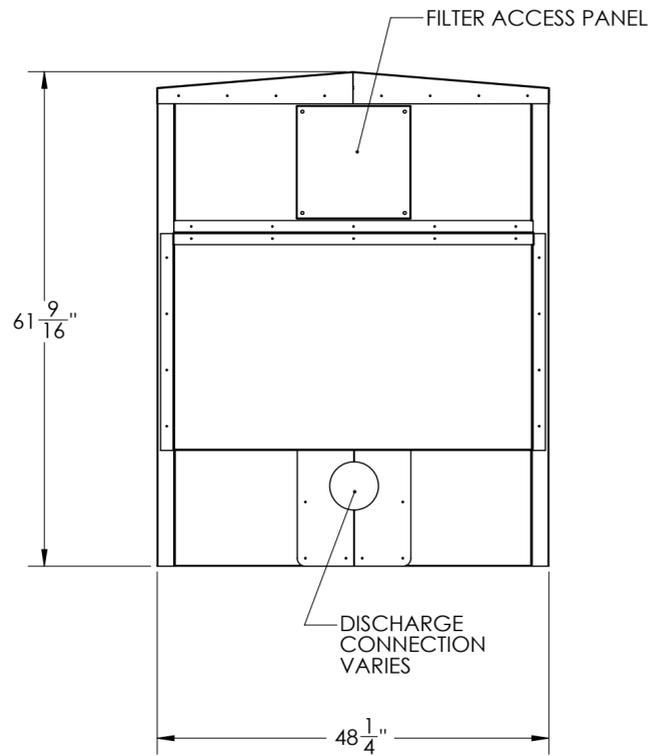


ENCLOSURE SPECIFICATIONS:

1. MATERIAL OF CONSTRUCTION: 16 GA POWDER COATED STEEL
2. QTY (4) HINGED DOORS (2 PER SIDE)
3. QTY (8) 1/2 TURN COMPRESSION LATCHES (2 PER DOOR)
4. QTY (1) EXHAUST FAN (1/60/120V, 4.3 AMPS) w/ THERMOSTAT
5. ENCLOSURE AND VENT BOXES LINED W/ 2" ACOUSTICAL FOAM

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	DRAWING CREATED	1/13/12	BD

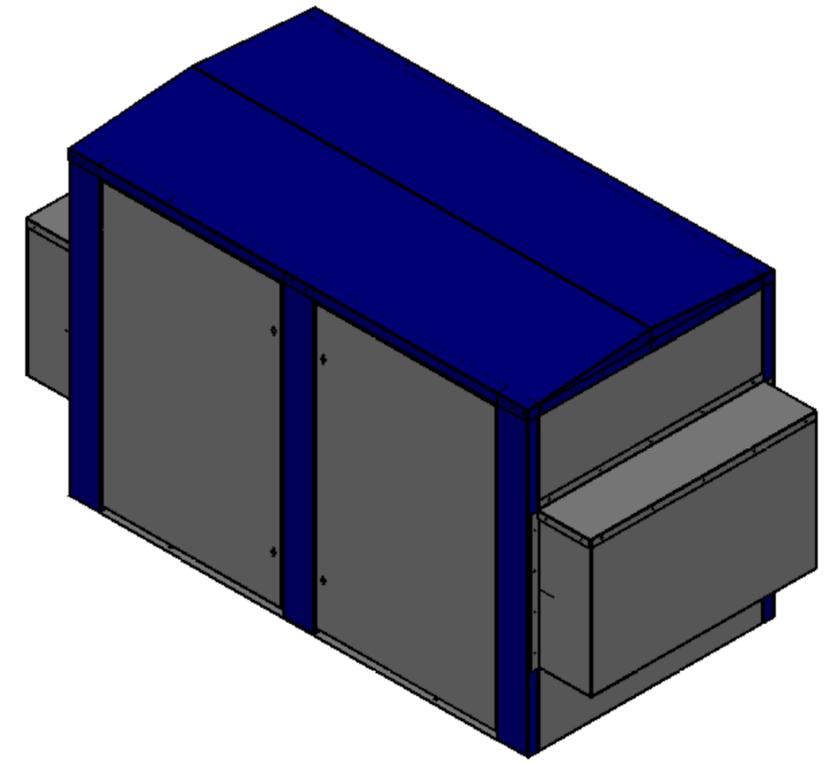

NOTE:

1. INSTALL AND OPERATE ACCORDING TO O&M MANUAL.
2. SOME ITEMS, USUALLY SILENCERS, MAY BE DISASSEMBLED FOR SHIPMENT. REASSEMBLY MAY BE REQUIRED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	 UNIVERSAL BLOWER PAC, INC. 440 PARK 32 WEST DRIVE NOBLESVILLE, IN 46060-9252 PHONE: 317-773-7256 www.universalblowerpac.com	
DIMENSIONS ARE IN INCHES		DRAWN	BD		TITLE: Q-Pac Enclosure 5,5
TOLERANCES:		CHECKED			
FRACTIONAL TO USER CONNECTIONS: ±1"		ENG APPR.			
FRACTIONAL TO MOUNTING LOCATIONS: 1/4"		MATERIAL		SIZE DWG. NO. C QP_ATT_5_Submittal	
OTHER FRACTIONAL: ±1		STOCK SIZE			
ANGULAR: MACH±0.5 BEND ±2		FINISH		SCALE: 1:16 SHEET 1 OF 1	
TWO PLACE DECIMAL ±0.05		DO NOT SCALE DRAWING			
THREE PLACE DECIMAL ±0.005					